

Under Ground Light

-High protection grade(IP67), effectively reducing maintenance cost.
 -All under ground lights are ccc approved, are designed according to the Chinese national standard .GB7000.1/GB7000.12/GB17625.1, safe and trustworthy.

Applications:


-Suitable for decorative lighting of building side, sculpture, walking street, plaza and so on



NE001-B




- Applications:**
Suitable for decorative lighting of building side, sculpture, walking street, plaza and so on
- Material:**
Stainless steel housing, corrosion-proof
Pure aluminum reflector, with excellent lighting performance
10mm Toughened glass, heat-resisting and anti-impact
- Characteristics:**
Pressurize by silicon seal cushion, water proof
Special design for reflector, adjustable vertically
Integrated fitting and gear.It is convenient to maintain
Plastic pre-embedded canister, easy to install;
Quantity/CTN(pcs): 2
CTN Dimension: 540x275x320mm




NE010-A



- Applications:**
Suitable for decorative lighting of walking street,plaza,road direction plant, courtyard and so on.
- Material:**
Stainless steel trim
Aluminum cast housing, corrosion-proof
Pure aluminum reflector, with excellent lighting performance
10mm Toughened glass, heat-resisting and anti-impact
- Characteristics:**
Pressurize by silicon seal cushion, water-proof
Adjustable reflector
Fitting and gear are integrated. It is convenient to maintain
Plastic pre-embedded canister, easy to install
Quantity/CTN(pcs): 2
CTN Dimension: 540x275x320mm

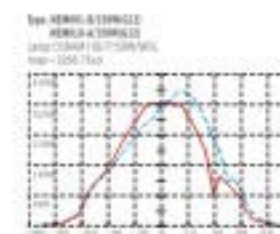

Remark: To ensure expedite drainage, installation in gravel of 200-300mm thickness is suggested.

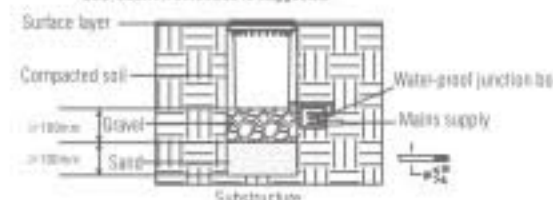

Model	Lamp	Base	Lamp Shape	Matched Lamp Current	Input	Power Factor	IP
NE001-A/150W/67%	HQ-TS150W	67%		1.0	AC220V/50Hz	0.95	67
NE001-A/150W/G12	HQ-T150W	G12		1.0	AC220V/50Hz	0.95	67
NE001-A/70W/67%	HQ-TS70W	67%		0.96	AC220V/50Hz	0.95	67
NE001-A/70W/G12	HQ-T70W	G12		0.96	AC220V/50Hz	0.95	67
NE010-A/150W/67%	HQ-TS150W	67%		1.0	AC220V/50Hz	0.95	67
NE010-A/150W/G12	HQ-T150W	G12		1.0	AC220V/50Hz	0.95	67
NE010-A/70W/67%	HQ-TS70W	67%		0.96	AC220V/50Hz	0.95	67
NE010-A/70W/G12	HQ-T70W	G12		0.96	AC220V/50Hz	0.95	67

Warning: The lamp must be positioned at required angle, otherwise the product can not be normally functioned.



NE002-B



- **Applications:**
Suitable for decorative lighting of walking street, plaza, road direction, courtyard and soon
- **Material:**
Aluminum cast trim, with anticorrosion painting and electrostatic Painting treatment
Stainless body, corrosion-proof
Pure aluminum reflector, with excellent lighting performance
- **Characteristics:**
Novel design, light only comes out through two sides
10mm Toughened glass, Heat-resisting and anti-impact
Pressurize by silicon seal cushion, water-proof
Integrated fitting and gear. It is convenient to maintain
Plastic pre-embedded canister, easy to install
Quantity/CTN(pcs): 2
CTN Dimension: 560x280x370mm



Remark: To ensure expedite drainage, installation in gravel of 200-300mm thickness is suggested.

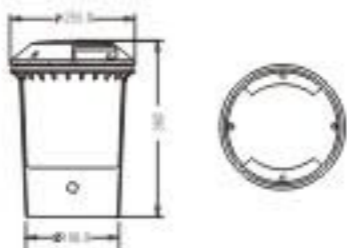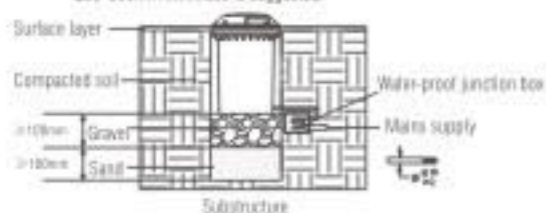



NE003-B



- **Applications:**
Suitable for decorative lighting of building sides, sculpture, plant walking street, plaza, road direction, courtyard and so on
- **Material:**
Stainless steel housing, corrosion-proof
Pure aluminum reflector, with excellent lighting performance
10mm Toughened glass, Heat resisting and anti-impact
- **Characteristics:**
Pressurize by silicon seal cushion, water-proof
Special design for reflector adjusted vertically
Integrated fitting and gear. It is convenient to maintain
Plastic pre-embedded canister, easy to install
Quantity/CTN(pcs): 2
CTN Dimension: 450x225x285mm



Remark: To ensure expedite drainage, installation in gravel of 200-300mm thickness is suggested.

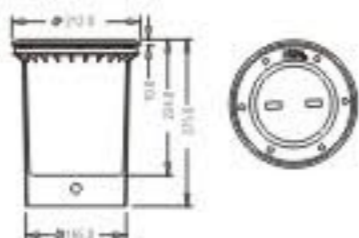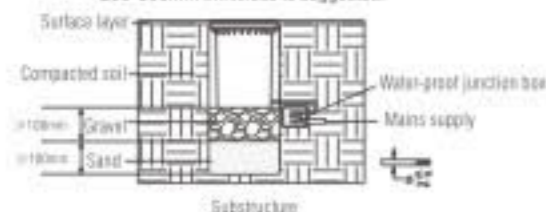

Model	Lamp	Base	Lamp Shape	Matched Lamp Current	Input	Power Factor	IP
NE002-B/15W/Rx7s	HQ-TS15W	Rx7s		1.8	AC220V/50Hz	0.85	67
NE002-B/75W/Rx7s	HQ-TS75W	Rx7s		0.98	AC220V/50Hz	0.85	67
NE003-B/75W/Rx7s	HQ-TS75W	Rx7s		0.98	AC220V/50Hz	0.85	67
NE003-B/75W/G12	HQ-TS75W	G12		0.98	AC220V/50Hz	0.85	67

Warning: The lamp must be positioned at marked angle, otherwise the product can not be normally functioned.



NE004-B



- **Applications:**
Suitable for decorative lighting of building sides, sculpture, plant walking street, plaza, road direction, courtyard and so on
- **Material:**
Stainless steel housing, corrosion-proof
5mm Toughened glass, heat-resisting and anti-impact
- **Characteristics:**
Lamp: 12V MR16 50W max
Base :Gx5.3
Pressurize by silicon seal cushion, water-proof
Plastic pre-embedded canister, easy to install
Quantity/CTN(pcs): 8
CTN Dimension: 240x240x310mm



Remark: To ensure expedite drainage, installation in gravel of 200-300mm thickness is suggested.

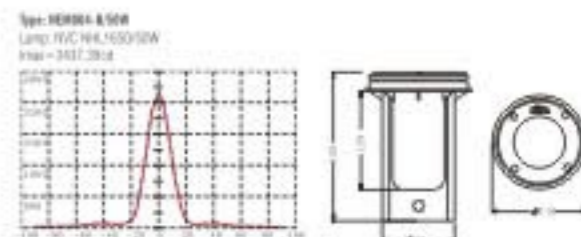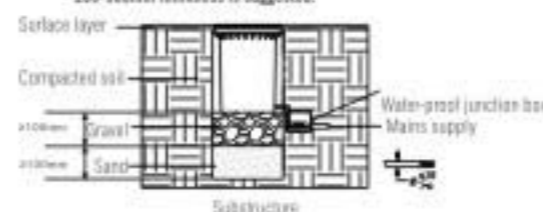



NE005-B



- **Applications:**
Suitable for decorative lighting of building sides, sculpture, plant walking street, plaza, road direction, courtyard and soon
- **Material:**
Stainless steel housing, corrosion-proof
5mm Toughened glass, heat-resisting and anti-impact
- **Characteristics:**
Lamp: 12V MR16 50W max
Base :Gx5.3
Pressurize by silicon seal cushion, different water proof
Plastic pre-embedded canister, easy to install
Quantity/CTN(pcs): 8
CTN Dimension: 240x240x310mm



Remark: To ensure expedite drainage, installation in gravel of 200-300mm thickness is suggested.

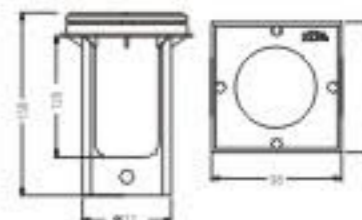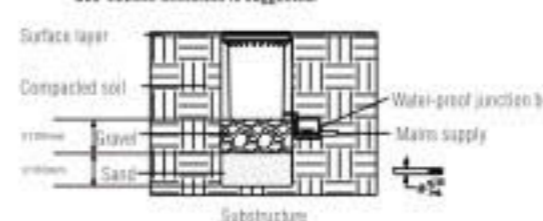



NE006-A



- Applications:**
Suitable for decorative lighting of walking street, plaza, road direction plant, courtyard and so on
- Material:**
Aluminum cast trim and housing, corrosion-proof and electrostatic painting treatment
Pure aluminum reflector, with excellent lighting performance
12mm Toughened glass, heat-resisting and anti-impact
- Characteristics:**
Pressurize by silicon seal cushion, water-proof
Integrated fitting and gear, it is convenient to maintain
Quantity/CTN(pcs): 1
CTN Dimension: 360x360x410mm



Remark: To ensure expedite drainage, installation in gravel of 200-300mm thickness is suggested.

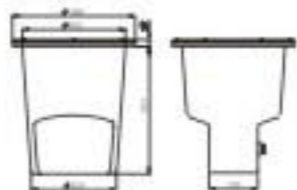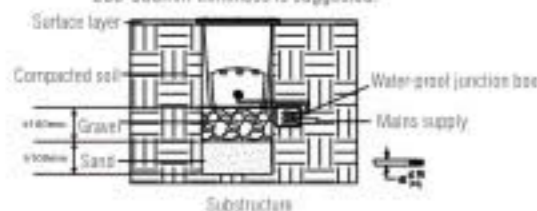



NE007-A



- Applications:**
Suitable for decorative lighting of building sides, sculpture, plant walking street, plaza, road direction, courtyard and so on
- Material:**
High quality stainless steel trim
Aluminum cast housing, corrosion-proof and electrostatic painting treatment
Pure aluminum reflector, with excellent lighting performance
10mm Toughened glass, heat-resisting and anti-impact
- Characteristics:**
Pressurize by silicon seal cushion, water-proof
Fitting and gear are integrated, it is convenient to maintain
Plastic pre-embedded canister, easy to install
Quantity/CTN(pcs): 2
CTN Dimension: 550x280x410mm



Remark: To ensure expedite drainage, installation in gravel of 200-300mm thickness is suggested.

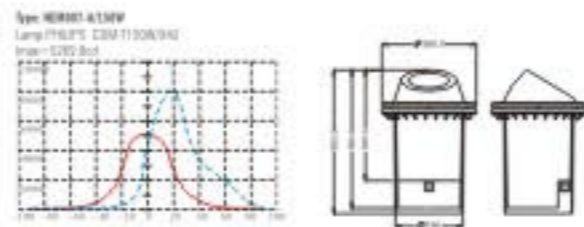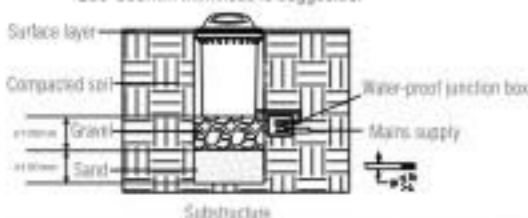

Model	Lamp	Base	Lamp Shape	Matched Lamp Current	Input	Power Factor	IP
NEM006-A/150W	NAV-T150W	E40		1.8	AC220V/50Hz	0.85	67
NEM006-A/150W	NAV-T250W	E40		3.0	AC220V/50Hz	0.85	67
NEM006-A/70W	HQI-E150W	E27		1.8	AC220V/50Hz	0.85	67
NEM006-A/250W	HPI-T250(P1xx)	E40		2.1	AC220V/50Hz	0.85	67
NEM007-A/70W	HQI-T70W	G12		0.98	AC220V/50Hz	0.85	67
NEM007-A/150W	HQI-T150W	G12		1.8	AC220V/50Hz	0.85	67

Warning: The lamp must be positioned at required angle, otherwise the product can not be normally functioned.



NE008-A



- Applications:**
Suitable for decorative lighting of walking street, plaza plant, road direction, courtyard and so on
- Material:**
Stainless steel trim
Aluminum cast housing, corrosion-proof
Pure aluminum reflector, with excellent lighting performance
10mm Toughened glass, heat-resisting and anti-impact
- Characteristics:**
Pressurize by silicon seal cushion, water-proof
Plastic pre-embedded canister, easy to install
Quantity/CTN(pcs): 2
CTN Dimension: 540x275x320mm



Remark: To ensure expedite drainage, installation in gravel of 200-300mm thickness is suggested.

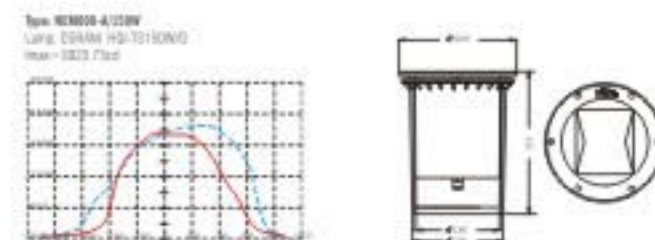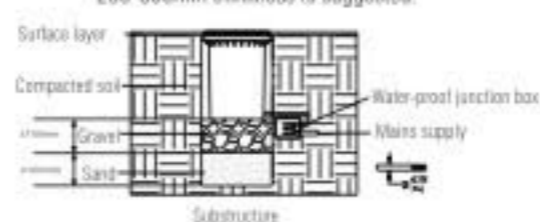



NE011-A



- Applications:**
Suitable for decorative lighting of walking street, plaza plant, road direction, courtyard and so on
- Material:**
Stainless steel trim
Aluminum cast housing, corrosion-proof
Pure aluminum reflector, with excellent lighting performance
10mm Toughened glass, heat-resisting and anti-impact
- Characteristics:**
Pressurize by silicon seal cushion, water-proof
Plastic pre-embedded canister, easy to install
Quantity/CTN(pcs): 2
CTN Dimension: 540x275x320mm



Remark: To ensure expedite drainage, installation in gravel of 200-300mm thickness is suggested.

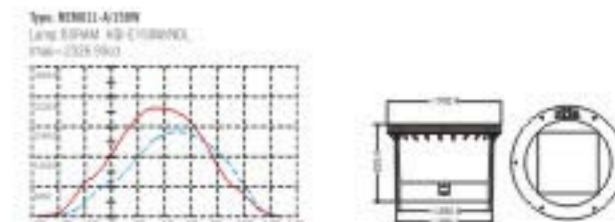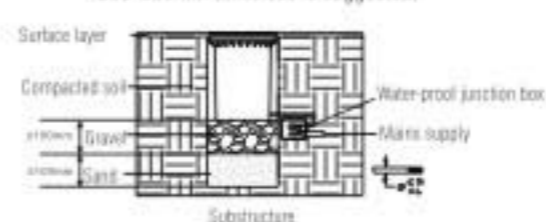

Model	Lamp	Base	Lamp Shape	Matched Lamp Current	Input	Power Factor	IP
NEM008-A/70W	HQI-TS70W	R67s		0.98	AC220V/50Hz	0.85	67
NEM008-A/150W	HQI-TS150W	R67s		1.8	AC220V/50Hz	0.85	67
NEM011-A/70W	HQI-E70W	E27		0.98	AC220V/50Hz	0.85	67
NEM011-A/70W	NAVI-T70W	E27		0.98	AC220V/50Hz	0.85	67
NEM011-A/150W	HQI-E150W	E27		1.8	AC220V/50Hz	0.85	67

Warning: The lamp must be positioned at required angle, otherwise the product can not be normally functioned.


NE009-A



NE009-A4



Remark: To ensure expedite drainage, installation in gravel of 200-300mm thickness is suggested.

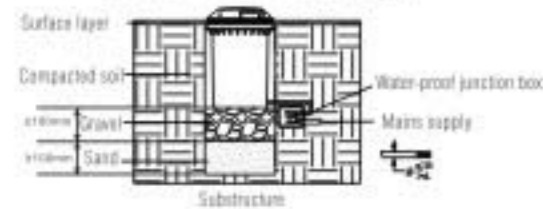



- **Applications:**
Suitable for decorative lighting of building sides, sculpture plant, walking street, plaza, road direction, courtyard and so on
- **Material:**
Aluminum cast trim and housing, corrosion-proof
Pure aluminum reflector, with excellent lighting performance
10mm Toughened glass, heat-resisting and anti-impact
- **Characteristics:**
Novel design, light only come out through two sides or four sides
Pressurize by silicon seal cushion, water-proof
Fitting and gear are integrated. It is convenient to maintain
Plastic pre-embedded canister, easy to install
Quantity/CTN(pcs): 2
CTN Dimension: 530x270x360mm



Model	Lamp	Base	Lamp Shape	Matched Lamp Current	Input	Power Factor	IP
NEM009-A/70W	HQI-TS70W	Rx7s	☛	0.98	AC220V/50Hz	0.85	67
NEM009-A/150W	HQI-TS150W	Rx7s	☛	1.8	AC220V/50Hz	0.85	67
NEM009-A4/70W	HQI-TS70W	Rx7s	☛	0.98	AC220V/50Hz	0.85	67
NEM009-A4/150W	HQI-TS150W	Rx7s	☛	1.8	AC220V/50Hz	0.85	67


Warning: The lamp must be positioned at required angle, otherwise the product can not be normally used.

NE014-A

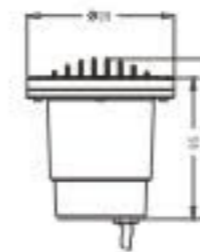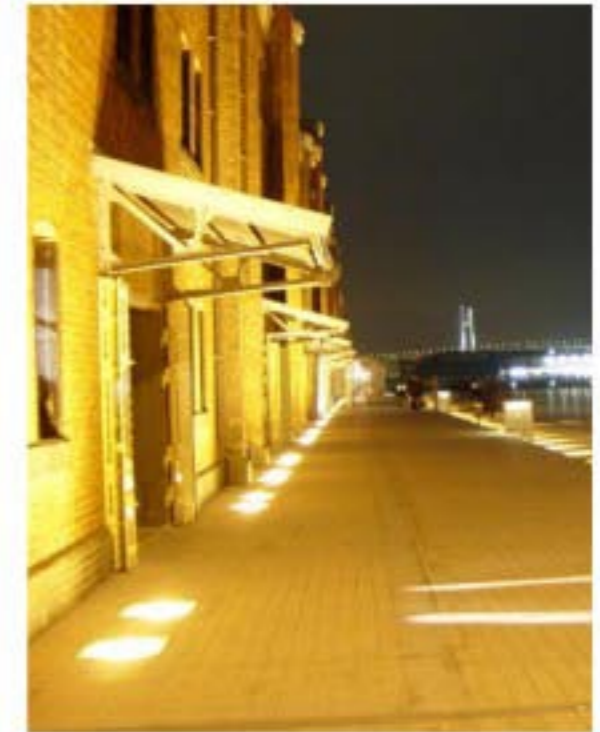


- **Applications:**
Suitable for decorative lighting of walking street, plaza, road direction plant, courtyard and so on
- **Material:**
Aluminum cast trim and housing, corrosion-proof
5mm Toughened glass, heat-resisting and anti-impact
- **Characteristics:**
Lamp: 12V MR16 50W max.
Base: Gx5.3
Pressurize by silicon seal cushion, water-proof
Quantity/CTN(pcs): 30
CTN Dimension: 520x260x310mm


Remark: To ensure expedite drainage, installation in gravel of 200-300mm thickness is suggested.

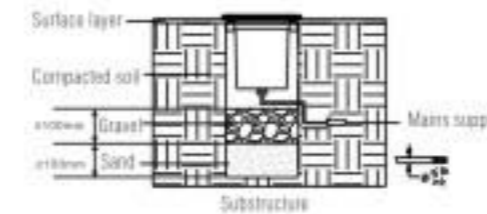

NEL13-AC

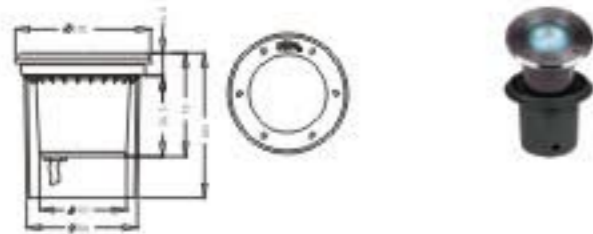

Remark: To ensure expedite drainage, installation in gravel of 200-300mm thickness is suggested.

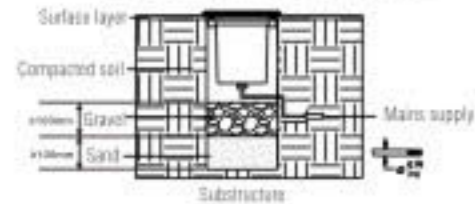

NEL020-AR



• **Applications:**

Suitable for decorative lighting of walking street, plaza, park, courtyard statue and so on

• **Material:**

Stainless steel trim
Aluminum cast housing, corrosion-proof
5mm Toughened glass, heat-resisting and anti-impact

• **Characteristics:**

Pressurize by silicon seal cushion, water-proof
Lamp:LED




Model	Color	PCS(LED)	Wattage	Input	Quantity/CTN(pcs)	CTN Dimension
NEL013-AC/R	Red	30	4.4W	AC220V/50Hz	16	320x250x210mm
NEL013-AC/Y	Yellow	30	4.4W	AC220V/50Hz	16	320x250x210mm
NEL013-AC/B	Blue	30	4.4W	AC220V/50Hz	16	320x250x210mm
NEL013-AC/G	Green	30	4.4W	AC220V/50Hz	16	320x250x210mm
NEL013-AC/W	White	30	4.4W	AC220V/50Hz	16	320x250x210mm
NEL013-AC/F	Colourful	30	4.4W	AC220V/50Hz	16	320x250x210mm
NEL020-AR/R	Red	16	1W	AC220V/50Hz	20	450x190x200mm
NEL020-AR/Y	Yellow	16	1W	AC220V/50Hz	20	450x190x200mm
NEL020-AR/B	Blue	16	1W	AC220V/50Hz	20	450x190x200mm
NEL020-AR/G	Green	16	1W	AC220V/50Hz	20	450x190x200mm
NEL020-AR/W	White	16	1W	AC220V/50Hz	20	450x190x200mm
NEL020-AR/F	Colourful	16	1W	AC220V/50Hz	20	450x190x200mm

NEL021-AC




Remark: To ensure expedite drainage, installation in gravel of 200-300mm thickness is suggested.

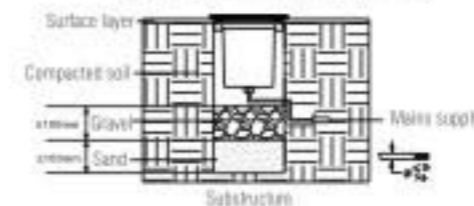

Model	Color	PCS(LED)	Wattage	Input	Quantity/CTN(pcs)	CTN Dimension
NEL021-AC/R	Red	12	1W	AC220V/50Hz	20	450x190x200mm
NEL021-AC/Y	Yellow	12	1W	AC220V/50Hz	20	450x190x200mm
NEL021-AC/B	Blue	12	1W	AC220V/50Hz	20	450x190x200mm
NEL021-AC/G	Green	12	1W	AC220V/50Hz	20	450x190x200mm
NEL021-AC/W	White	12	1W	AC220V/50Hz	20	450x190x200mm
NEL021-AC/F	Colourful	12	1W	AC220V/50Hz	20	450x190x200mm
NEL023-AC/R	Red	54	2.7W	AC220V/50Hz	8	400x400x250mm
NEL023-AC/Y	Yellow	54	2.7W	AC220V/50Hz	8	400x400x250mm
NEL023-AC/B	Blue	54	5.4W	AC220V/50Hz	8	400x400x250mm
NEL023-AC/G	Green	54	5.4W	AC220V/50Hz	8	400x400x250mm
NEL023-AC/W	White	54	5.4W	AC220V/50Hz	8	400x400x250mm
NEL023-AC/F	Colourful	54	5.4W	AC220V/50Hz	8	400x400x250mm
NEL023-AR/R	Red	49	3W	AC220V/50Hz	8	400x400x250mm
NEL023-AR/Y	Yellow	49	3W	AC220V/50Hz	8	400x400x250mm
NEL023-AR/B	Blue	49	4W	AC220V/50Hz	8	400x400x250mm
NEL023-AR/G	Green	49	4W	AC220V/50Hz	8	400x400x250mm
NEL023-AR/W	White	49	4W	AC220V/50Hz	8	400x400x250mm
NEL023-AR/F	Colourful	49	7W	AC220V/50Hz	8	400x400x250mm

NEL023-AC

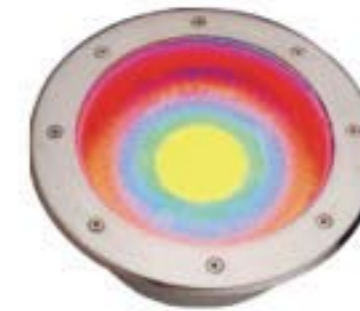

NEL023-AR

